artisan EXTERIOR

FLOOR

NATURAL STONE - ALL FORMATS

Technical Specification Guide

Table of Contents

Introduction 4-5
Product Reference Images (By Format) 6-23
Natural Stone Pavers & Tiles 6-9
Limestone 6-7
Marble 7-8
Travertine 8
Granite 9
Bluestone 9
Stone Crazy Paving 10-12
20mm Crazy Paving 10-11
Split Crazy Paving 11-12
Cobblestones 13-17
Uniform Mesh Cobblestones 13-14
Split Mesh Cobblestones 14-15
Uniform Loose Cobblestones 15-16
Split Loose Cobblestones 16-17
Stepping Stones 18-21
Circular Stepping Stones 18
Organic Stepping Stones 18-19
Rectangular Stepping Stones 19-21
Stone Step Treads 22-23
Format & Pattern Reference Images 24-27
Key Considerations 28
Technical Details (By Material) 29-50
Limestone 29-34
Hiekka 29
Kahvi 29-30
Matala 30
Montera 31
Olive 31-32
Platina 32-33
Ranta 33
Sokeria 33-34
Marble 35-38
Argento 35
Escura 35-36
Harmaa 36
Pantera 37
Tempest 37-38

Table of Contents

Valas 38

Travertine **39-41**

Alentaa 39

Premium Silver 39-40

Valo 40-41

Granite **42-44**

Aalto 42

Highland Grey 42-43

Raven 43-44

Sable 44

Bluestone **45**

Bluestone 45

Virtaava 45

Other **46-51**

Porphyry 46

Porphyry 46

Natural Quartzite 47-49

Acero 47

Calor 47

Heritage 47

Kaldur 47

Kuro 48

Montreux 48

Pilvi 48

Plume 48

Vari 49

Slate 50

Arkkia 50

Aska 50

Terracotta 51

Kotta 51

Seamles Texture Design Files 52-54

Forged by Nature, Crafted by Hand

Artisan Exterior's natural stone flooring collection is a celebration of the rich diversity found in marble, granite, travertine, bluestone, and limestone. Sourced globally and warehoused locally, each stone tells its own story through veining, fossilisation, and natural tonal variation that make every piece unique.

Available in a range of finishes and profiles, including single piece drop edges, the collection spans pavers, tiles, crazy paving, cobbles, steppers, and treads in a variety of dimensions and patterns to suit different design requirements. Crafted to bring lasting character to outdoor spaces, these materials can be viewed installed in our ACT, NSW, and QLD studios, open Monday to Saturday. Samples are also available to support your selection.

This document outlines the technical specifications for the range. For further detail or custom requirements, our team is ready to assist.

French Pattern Pavers & Uniform Loose Cobblestones
Kahvi Limestone

Pavers (30mm thick) & Tiles (20mm thick)
Olive Limestone

Crazy Paving (20mm & Split)
Arkkia Slate

Split Mesh Cobblestones
Pilvi Natural Quartzite

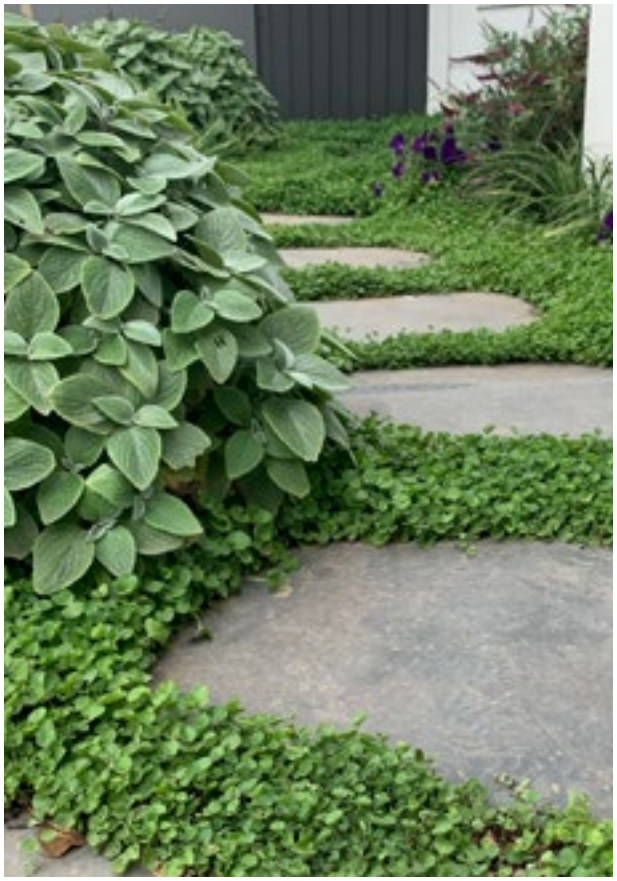

Organic Stepping Stones
Bluestone

Natural Stone - Pavers & Tiles

LIMESTONE

HIEKKA

KAHVI

MATALA

MONTERA

OLIVE

PLATINA

Natural Stone - Pavers & Tiles

LIMESTONE (Continued)

RANTA

SOKERIA

MARBLE

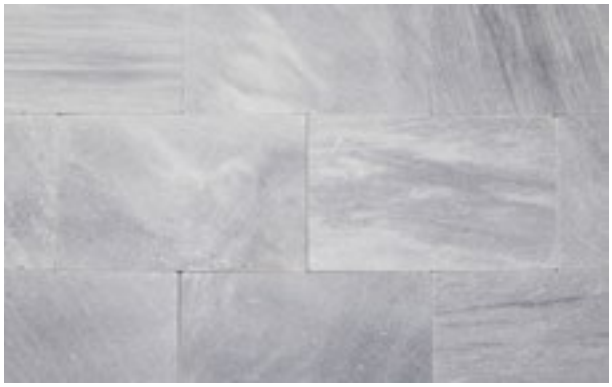

ARGENTO

ESCURA

HARMAA

PANTERA

Natural Stone - Pavers & Tiles

MARBLE (Continued)

TEMPEST

VALAS

TRAVERTINE

ALENTAA

PREMIUM SILVER

VALO

Natural Stone - Pavers & Tiles

GRANITE

AALTO

HIGHLAND GREY

RAVEN

BLUESTONE

VIRTAAVA

Stone Crazy Paving

20mm CRAZY PAVING

BLUESTONE (Bluestone)

HARMAA (Marble)

KAHVI (Limestone)

MONTERA (Limestone)

OLIVE (Limestone)

PANTERA (Marble)

Stone Crazy Paving

20mm CRAZY PAVING (Continued)

RANTA (Limestone)

SOKERIA (Limestone)

VALAS (Marble)

SPLIT CRAZY PAVING

ARKKIA (*Other* - Slate)

CALOR (*Other* - Natural Quartzite)

Stone Crazy Paving

SPLIT CRAZY PAVING (continued)

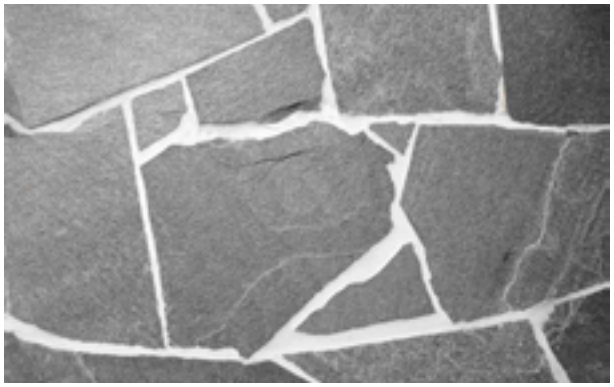

KALDUR (*Other* - Natural Quartzite)

KURO (*Other* - Natural Quartzite)

PORPHYRY (*Other* - Porphyry)

Cobblestones

UNIFORM MESH COBBLESTONES

ESCURA (Marble)

HARMAA (Marble)

HIGHLAND GREY (Granite)

PANTERA (Marble)

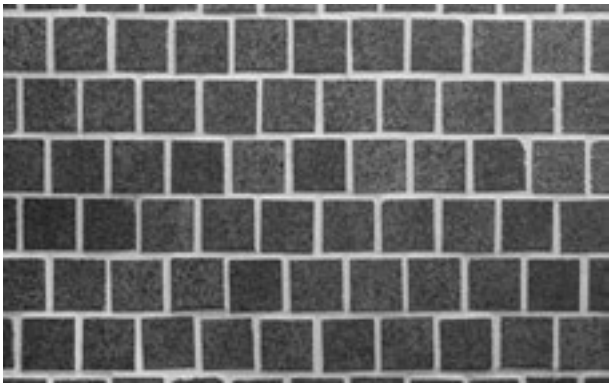

RAVEN (Granite)

SABLE (Granite)

Cobblestones

UNIFORM MESH COBBLESTONES (Continued)

VALAS (Marble)

SPLIT MESH COBBLESTONES

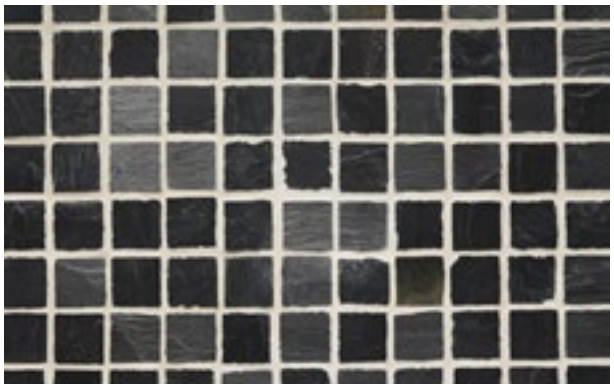

ASKA (*Other* - Slate)

HERITAGE (*Other* - Natural Quartzite)

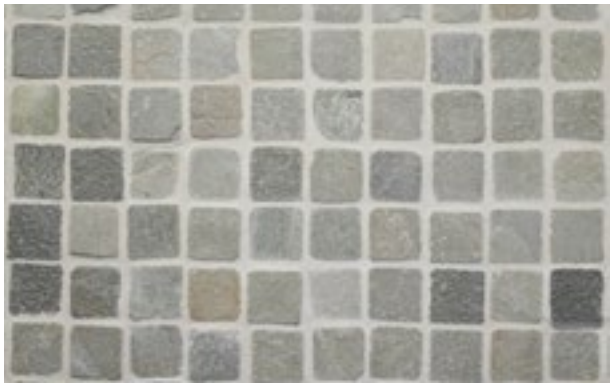

MONTREUX (*Other* - Natural Quartzite)

PILVI (*Other* - Natural Quartzite)

Cobblestones

SPLIT MESH COBBLESTONES (Continued)

PLUME (*Other* - Natural Quartzite)

VARI (*Other* - Natural Quartzite)

UNIFORM LOOSE COBBLESTONES

KAHVI (Limestone)

KOTTA (Terracotta)

OLIVE (Limestone)

PANTERA (Marble)

Cobblestones

UNIFORM LOOSE COBBLESTONES (Continued)

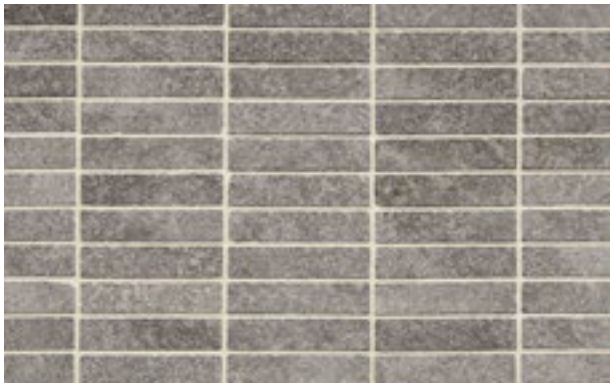

PLATINA (Limestone)

SOKERIA (Limestone)

VALAS (Marble)

SPLIT LOOSE COBBLESTONES

ACERO (*Other* - Natural Quartzite)

ARKKIA - Cube (*Other* - Slate)

Cobblestones

SPLIT LOOSE COBBLESTONES (Continued)

ARKKIA - Filetti (*Other* - Slate)

PORPHYRY - Cube (*Other* - Porphyry)

PORPHYRY - Filetti (*Other* - Porphyry)

Stepping Stones

CIRCULAR STEPPING STONES

HIGHLAND GREY (Granite)

MATALA (Limestone)

RAVEN (Granite)

ORGANIC STEPPING STONES

ALENTAA (Travertine)

BLUESTONE (Bluestone)

Stepping Stones

ORGANIC STEPPING STONES (Continued)

KAHVI (Limestone)

OLIVE (Limestone)

SOKERIA (Limestone)

RECTANGULAR STEPPING STONES

ESCURA (Marble)

HIEKKA (Limestone)

Stepping Stones

RECTANGULAR STEPPING STONES (Continued)

HIGHLAND GREY (Granite)

KAHVI (Limestone)

MATALA (Limestone)

PLATINA (Limestone)

RAVEN (Granite)

TEMPEST (Marble)

Stepping Stones

RECTANGULAR STEPPING STONES (Continued)

VIRTAAVA (Bluestone)

Stone Step Treads

HIGHLAND GREY (Granite)

KAHVI (Limestone)

MATALA (Limestone)

PREMIUM SILVER (Travertine)

RAVEN (Granite)

VALO (Travertine)

Stone Step Treads

VIRTAAVA (Bluestone)

Formats & Patterns

PAVERS & TILES

Tile Formats
Up to 20mm thickness, within tolerance

Paver Formats
30mm thickness and above, within tolerance

MODULAR & IRREGULAR

Crazy Paving

French Pattern

Standard French Pattern (Half Set)

Pieces	Size
1	A. 600x400mm
2	B. 400x400mm
1	C. 400x200mm
2	D. 200x200mm

Large Modular Pattern (Half Set)

Pieces	Size
1	A. 900x600mm
2	B. 600x600mm
1	C. 600x300mm
2	D. 300x300mm

Formats & Patterns

COBBLESTONES

Mesh - Uniform & Split



Brickbond

Straightbond

Uniform Loose

Herringbone



Brick

Cube



Elongated Brick

Split Loose



Cube

Fan

Filetti



Raw

Formats & Patterns

STEPPING STONES



Circular Stepper (Medium)



Circular Stepper (Large)

Organic Stepper (Medium)

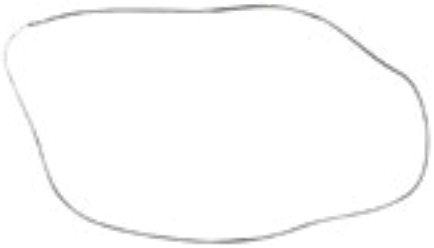

Organic Stepper (Large)

Rectangular Stepper

Formats & Patterns

STEP TREADS, COPING, REBATES & PROFILES

Step Tread (Bullnose Profile)

Step Tread (Pencil Edge Profile)

Coping

Rebate (Drop Edge)

Bullnose

Pencil Round

Rebated Profile

Working with Natural Stone: Key Considerations

NATURAL VARIATION

All our natural stone products display natural variation, which is part of their beauty and individuality. Each piece will differ slightly in colour, tone, and texture, giving every project a unique character. The images and displays shown on our website, in our galleries, and in our studios are indicative only and serve as a general guide to the overall look of the product. Because natural stone is formed by nature, no two pieces are identical. Clients seeking a uniform and consistent appearance should consider porcelain alternatives, as they are manufactured for a more controlled finish.

NATURAL IMPERFECTIONS AND INSTALLATION ALLOWANCE

Natural stone and hand-finished products often display variations and imperfections that form part of their inherent character. During production, handling, and packing, some pieces may show rougher edges, heavier chipping, or stronger colour variation than others—particularly in tumbled, split-face, or cobblestone formats. Products such as **travertine** may feature natural holes, and some pieces can have a higher number or slightly larger cavities than others. Similarly, **limestone and marble** may contain visible fossils, with some pieces showing a heavier concentration of fossil patterns. These natural traits are expected and contribute to the authenticity of the material. During installation, installers should set aside any pieces with more noticeable irregularities for cutting or wastage, and it is recommended to include an appropriate wastage allowance when ordering to ensure full coverage and a consistent final appearance.

DRYING TIME AFTER INSTALLATION

Natural stone products may take several days or even weeks to fully dry after installation, depending on the product's density, porosity, and the surrounding weather conditions. It is important to allow adequate drying time before assessing the final colour tone, appearance, or overall finish, as the stone's true characteristics become visible only once it has completely dried.

QUARTZ DEPOSITS AND VEINING

All natural stone products may occasionally contain **quartz deposits** or **quartz lines**, which are naturally formed during the stone's creation. These lines are actually **natural veins**, not structural cracks, and are a normal characteristic of genuine stone. Because natural stone develops over thousands of years through mineral movement and pressure, visible quartz veins and variations are expected and contribute to its authentic charm. Products such as **Montera Limestone** often display more frequent quartz deposits and natural pebble-like inclusions, which enhance their unique appearance and make each piece distinctively attractive.

NATURALLY OCCURRING IRON CONTENT

All natural stone products contain varying levels of minerals, including **iron**, which is a naturally occurring component within the stone's composition. From piece to piece, some stones may display visible iron deposits that can occasionally react with moisture and the environment, forming slight rust-like markings. This is a normal and expected characteristic of genuine stone. Products such as **Kahvi** and **Platina Limestones** may occasionally feature small pieces with faint rust tones caused by this natural process. Similarly, **Bluestone** generally contains higher iron content than other stones, and over time, some pieces may gradually develop subtle brownish tones as a result. These variations add authenticity and natural character to the stone. If desired, suitable cleaning solutions are available from **Artisan Exterior** to help remove or lighten any visible iron marks.

PENCIL ROUND & FULL PIECE DROP EDGE PROFILES FOR TUMBLED STONE

When creating **Pencil Round Profiles** or **Full Piece Drop Edges** on tumbled materials, the tumbled character of the stone may remain partially visible along the profiled edges and corners. These softened edges, subtle irregularities, and natural textures are an inherent part of tumbling process and are completely expected. They contribute to the authentic, aged appearance that makes tumbled finishes unique and desirable.

Note: All above listed characteristics of natural stone are inherent to the material's natural formation and are not considered defects.

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

HIEKKA - Sandblasted Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
105	15.4	0.25	2.16	0.91	2.02		60.4 / 37.1

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
800x400x20mm	P5	52kg/m²	16m²	Sawn	+/- 2mm	+/- 2mm
Copings						
800x400x30mm	P5	25kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	25kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

KAHVI - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
105	15.4	0.25	2.16	0.91	2.02	102 / 41.6	43.66 / 31.27

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
400x400x30mm	P4	77kg/m²	10.56m²	Antique	+/- 2mm	+/- 2mm
600x400x30mm	P4	77kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
600x600x30mm	P4	77kg/m²	11.88m²	Antique	+/- 2mm	+/- 2mm
600x400x13mm	P4	34kg/m²	36m²	Antique	+/- 2mm	+/- 2mm
400x400x13mm	P4	34kg/m²	24m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P4	51kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
400x400x30mm	P4	13kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
600x400x30mm	P4	19kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
600x600x30mm	P4	28kg each	32Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P4	22kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/75mm	P4	21kg each	36Pcs	Rebate	+/- 2mm	+/- 2mm
Rebated 800x400x20/55mm	P4	18kg each	24Pcs	Rebate	+/- 2mm	+/- 2mm

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

KAHVI - Antique Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
French Pattern 30mm	P4	77kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
French Pattern 13mm	P4	34kg/m²	34.56m²	Antique	+/- 2mm	+/- 2mm
Crazy Paving 20mm	P4	56kg/m²	20m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P4	82kg/m²	10.24m²	Antique	+/- 2mm	+/- 2mm
Uniform Loose 200x50x20mm	P4	76.5kg/m²	25.2m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Organic - Medium ~600mmx600mmx30mm	P4	~30kg each	33Pcs	Split	+/- 100mm	+/- 2mm
Organic - Large ~900mmx500mmx30mm	P4	~45kg each	27Pcs	Split	+/- 100mm	+/- 2mm
Rectangular 800x400x30mm	P4	23kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P4	38kg each	25Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

MATALA - Sandblasted Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
117	13.9		3.18	2.13	3.45		53.35 / 37.3

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
800x400x20mm	P5	54kg/m²	16m²	Sawn	+/- 2mm	+/- 2mm
Copings						
800x400x30mm	P5	25kg each	66Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 800x400x20/60mm	P5	19.45g each	32Pcs	Rebate	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Circular - Medium Ø 600x30mm	P5	25kg each	40Pcs	Sawn	+/- 2mm	+/- 2mm
Circular - Large Ø 800x30mm	P5	44kg each	25Pcs	Sawn	+/- 2mm	+/- 2mm
Rectangular 800x400x30mm	P5	25kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P5	39kg each	20Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

MONTERA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
55	11		2.21	2.50	5.50		39.21 / 24.05

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	78kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P5	52kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
600x400x20mm	P5	52kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	19kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P5	26kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	52kg/m²	20m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	82kg/m²	12.24m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	25kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

OLIVE - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
117	13.9		3.18	2.13	3.45		49.39 / 34.02

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	80kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
600x400x10mm	P5	27kg/m²	46.08m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P5	54kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	20kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P5	24kg each	32Pcs	Rebate	+/- 2mm	+/- 2mm

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

OLIVE - Antique Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Copings (Continued)						
Rebated 800x400x20/60mm	P5	20kg each	32Pcs	Rebate	+/- 2mm	+/- 2mm
800x400x30mm	P5	25kg each	33pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Modular & Irregular						
French Pattern 30mm	P5	80kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
French Pattern 10mm	P5	27kg/m²	38.88m²	Antique	+/- 2mm	+/- 2mm
Crazy Paving 20mm	P5	56kg/m²	20m²	Antique	na	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	82kg/m²	14.4m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Organic - Medium ~600mmx600mmx30mm	P5	~30kg each	33Pcs	Split	+/- 100mm	+/- 2mm
Organic - Large ~900mmx500mmx30mm	P5	~45kg each	27Pcs	Split	+/- 100mm	+/- 2mm
Rectangular 800x400x30mm	P5	25kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

PLATINA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
66	6.33	0.22	3.64	1.34	2.00	106 / 40.80	

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P4	78kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P4	52kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P4	19kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
600x400x30mm	P4	19kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/75mm	P4	22kg each	36Pcs	Rebate	+/- 2mm	+/- 2mm
Rebated 800x400x20/55mm	P4	21kg each	24Pcs	Rebate	+/- 2mm	+/- 2mm
800x400x30mm	P4	26kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

PLATINA - Antique Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Uniform Loose 200x50x30mm	P4	82kg/m²	10.24m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P4	26kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

RANTA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
55	11		3.11	2.50	5.50		38.22 / 24.21

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
900x400x20mm	P5	56kg/m²	25.2m²	Antique	+/- 2mm	+/- 2mm
Copings						
900x400x30mm	P5	28kg each	40Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 900x400x20/60mm	P5	22kg each	32Pcs	Rebate	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	56kg/m²	20m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	86kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 900x400x30mm	P5	28kg each	40Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

SOKERIA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
105	15.4	0.25	2.16	0.91	2.02	104 / 40.60	51.9 / 35.99

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	81kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm

Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

SOKERIA - Antique Finish (Continued)						
Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles (Continuted)						
800x400x20mm	P5	51kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	20kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P5	22kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	56kg/m²	20m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	82kg/m²	10.24m²	Antique	+/- 2mm	+/- 2mm
Uniform Loose 200x50x20mm	P5	76.5kg/m²	25.2m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Organic Medium ~600mmx600mmx30mm	P5	~30kg each	33Pcs	Split	+/- 100mm	+/- 2mm
Organic Large ~900mmx500mmx30mm	P5	~45kg each	27Pcs	Split	+/- 100mm	+/- 2mm
Rectangular 800x400x30mm	P5	22.45kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ARGENTO- Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
56.00	14.00		<1	0.10	1.10		

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
400x400x30mm	P4	81kg/m²	10.88m²	Antique	+/- 2mm	+/- 2mm
600x400x30mm	P4	81kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
400x400x15mm	P4	41kg/m²	15.36m²	Antique	+/- 2mm	+/- 2mm
600x400x15mm	P4	41kg/m²	31.68m²	Antique	+/- 2mm	+/- 2mm
Copings						
400x400x30mm	P4	13kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
600x400x30mm	P4	20kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P4	27kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P4	22kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Modular & Irregular						
French Pattern 30mm	P4	27kg each	34Pcs	Antique	+/- 2mm	+/- 2mm
French Pattern 20mm	P4	39kg each	25Pcs	Antique	+/- 2mm	+/- 2mm

ESCURA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
52.00	14.00		<1	0.15	1.14		47.42 / 32.69

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	86kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
800x400x30mm	P5	56kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
800x400x30mm	P5	20kg each	28Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	56kg/m²	24.48m²	Antique	na	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	86kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm

Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ESCURA - Antique Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones (Continued)						
Uniform Mesh Straightbond 90x90x20mm	P5	78kg/m²	19.2m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	28.8kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P5	38.2 kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

HARMAA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
52.00	14.00		<1	0.15	1.14		41.01 / 27.68

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	81kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P5	56kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	20kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P5	29kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P5	23kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	56kg/m²	24.48m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	81kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
Uniform Mesh Straightbond 90x90x20mm	P5	78kg/m²	19.2m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	28.8kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P5	38.2 kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

PANTERA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
138.00	20.00		<1	0.10	0.10		22.69 / 6.98

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	82kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	20kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P5	21kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	58kg/m²	24m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	82kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
Uniform Mesh Straightbond 90x90x20mm	P5	78kg/m²	19.2m²	Antique	+/- 2mm	+/- 2mm

TEMPEST - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
109.00	14.51		<1	0.05	0.18		46.66 / 28.69

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	83kg/m²	15.84m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P5	55kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	19kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P5	27kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P5	22kg each	48Pcs	Rebate	+/- 2mm	+/- 2mm
Rebated 800x400x20/60mm	P5	20kg each	64Pcs	Rebate	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	28.8kg each	34Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

TEMPEST - Antique Finish (Continued)							
Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Stepping Stones & Treads (Continued)							
Step Tread 1210x400x30mm	P5	38kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm	

VALAS - Antique Finish							
Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
52.00	14.00		<1	0.15	1.14		43.76 / 26.02

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	80kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
Copings						
400x400x30mm	P5	13kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
600x400x30mm	P5	19kg each	68Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
Rebated 600x400x30/80mm	P5	22kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Modular & Irregular						
Crazy Paving 20mm	P5	58kg/m²	24m²	Antique	n/a	+/- 2mm
Cobblestones						
Uniform Loose 200x50x30mm	P5	79.5kg/m²	16.32m²	Antique	+/- 2mm	+/- 2mm
Uniform Mesh Straightbond 90x90x20mm	P5	78kg/m²	19.2m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Organic Medium ~600mmx600mmx30mm	P5	~22kg each	30Pcs	Split	+/- 100mm	+/- 2mm
Organic Large ~900mmx500mmx30mm	P5	~43kg each	20Pcs	Split	+/- 100mm	+/- 2mm
Step Tread 1210x400x30mm	P5	38.2 kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ALENTAA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
85.27	11.30		<1	0.93	3.00		69.72 / 54.85

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x11mm	P5	32.4kg/m²	38.4m²	Antique	+/- 2mm	+/- 2mm
600x400x30mm	P5	20.31kg/m²	15.8m²	Antique	+/- 2mm	+/- 2mm
800x400x20mm	P5	56kg/m²	16m²	Antique	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	20.3kg each	66Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 600x406x30/80mm	P5	27kg each	36Pcs	Rebate	+/- 2mm	+/- 2mm
*Rebated 800x400x20/60mm	P5	26kg each	24Pcs	Rebate	+/- 2mm	+/- 2mm
						**Rebate has sawn finish on the drop face*
Modular & Irregular						
Crazy Paving 20mm	P5	56kg/m²	20m²	Antique	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Organic - Medium ~600mmx600mmx30mm	P5	~30kg each	33Pcs	Split	+/- 100mm	+/- 100mm
Organic - Large ~900mmx500mmx30mm	P5	~45kg each	27Pcs	Split	+/- 100mm	+/- 100mm
Rectangular 800x400x30mm	P5	23kg each	33Pcs	Antique (Profiles Available)	+/- 2mm	+/- 2mm

PREMIUM SILVER TRAVERTINE - Tumbled Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
79.00	10.40		<1	0.67	2.10		36.66 / 24.31

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
406x406x12mm	P3	30kg/m²	26.37m²	Tumbled	+/- 2mm	+/- 2mm
610x406x12mm	P3	30kg/m²	39.63m²	Tumbled	+/- 2mm	+/- 2mm
406x406x30mm	P3	74kg/m²	10.88m²	Tumbled	+/- 2mm	+/- 2mm
610x406x30mm	P3	74kg/m²	16.35m²	Tumbled	+/- 2mm	+/- 2mm

Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

PREMIUM SILVER TRAVERTINE - Tumbled Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Copings						
406x406x30mm	P3	13kg each	68Pcs	Tumbled (Profiles Available)	+/- 2mm	+/- 2mm
610x406x30mm	P3	18kg each	68Pcs	Tumbled (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 610x406x30/60mm	P3	22kg each	48Pcs	Rebate	+/- 2mm	+/- 2mm
*Rebated 610x406x30/80mm	P3	23kg each	48Pcs	Rebate	+/- 2mm	+/- 2mm
					Rebate has sawn finish on the drop face	
Modular & Irregular						
French Pattern 30mm	P3	75kg/m²	16.35m²	Tumbled	+/- 2mm	+/- 2mm
French Pattern 12mm	P3	30kg/m²	38.59m²	Tumbled	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
**Step Tread 1220x406x30mm	P3	36.16kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
					***1220 long steps have honed and unfilled finish on top and surface*	

VALO - Tumbled Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
85.27	11.30		<1	0.93	3.00		45.91 / 39.95

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
406x406x30mm	P3	78kg/m²	10.56m²	Tumbled	+/- 2mm	+/- 2mm
610x406x30mm	P3	78kg/m²	15.84m²	Tumbled	+/- 2mm	+/- 2mm
406x406x12mm	P3	31kg/m²	25.60m²	Tumbled	+/- 2mm	+/- 2mm
610x406x12mm	P3	31kg/m²	38.40m²	Tumbled	+/- 2mm	+/- 2mm
Copings						
406x406x30mm	P3	12kg each	66Pcs	Tumbled (Profiles Available)	+/- 2mm	+/- 2mm
610x406x30mm	P3	18kg each	66Pcs	Tumbled (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 610x406x30/60mm	P3	21kg each	48Pcs	Rebate	+/- 2mm	+/- 2mm
*Rebated 610x406x30/80mm	P3	27kg each	48	Rebate	+/- 2mm	+/- 2mm
					Rebate has sawn finish on the drop face	

Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

VALO - Tumbled Finish						
Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
French Pattern 30mm	P3	78kg/m²	15.84m²	Tumbled	+/- 2mm	+/- 2mm
French Pattern 12mm	P3	31kg/m²	37.44m²	Tumbled	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
**Step Tread 1220x406x30mm	P3	36kg each	33Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

***1220 long steps have honed and unfilled finish on top and surface*

Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

AALTO - Flamed Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
191.5	15.6		75	0.30	0.90		31.26 / 14.19

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	81kg/m²	16.32m²	Sawn	+/- 2mm	+/- 2mm
400x400x30mm	P5	81kg/m²	10.88m²	Sawn	+/- 2mm	+/- 2mm
600x400x12mm	P5	32.5kg/m²	31.20m²	Sawn	+/- 2mm	+/- 2mm
Copings						
400x400x30mm	P5	13kg each	68Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
600x400x30mm	P5	19.5kg each	68Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 600x400x30/80mm	P5	22.1kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm

HIGHLAND GREY - Flamed Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
205.7	22.2		58.8	0.14	0.40		27.75 / 10.7

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	87kg/m²	16.32m²	Sawn	+/- 2mm	+/- 2mm
400x400x30mm	P5	87kg/m²	16.32m²	Sawn	+/- 2mm	+/- 2mm
600x400x12mm	P5	35kg/m²	28.8m²	Sawn	+/- 2mm	+/- 2mm
600x400x12mm	P5	35kg/m²	19.2m²	Sawn	+/- 2mm	+/- 2mm
Copings						
400x400x30mm	P5	14kg each	68Pcs	Sawn (Profiles Available	+/- 2mm	+/- 2mm
600x400x30mm	P5	21kg each	68Pcs	Sawn (Profiles Available	+/- 2mm	+/- 2mm
*Rebated 600x400x30/80mm	P5	23.7kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Cobblestones						
Uniform Mesh Straightbond 90x90x20mm	P5	52kg/m²	24.7m²	Split	+/- 2mm	+/- 2mm
Uniform Mesh Brickbond 90x90x20mm	P5	52kg/m²	24.7m²	Split	+/- 2mm	+/- 2mm

Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

HIGHLAND GREY - Flamed Finish (Continued)

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Stepping Stones & Treads						
Circular - Medium Ø 600x30mm	P5	20kg each	25Pcs	Sawn	+/- 2mm	+/- 2mm
Circular - Large Ø 800x30mm	P5	35kg each	40Pcs	Sawn	+/- 2mm	+/- 2mm
Rectangular 800x400x30mm	P5	26.8kg each	35Pcs	Sawn (Profiles Available	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P5	35kg each	50Pcs	Sawn (Profiles Available	+/- 2mm	+/- 2mm

RAVEN - Flamed Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
141	24		47.08	0.14	0.41		13.48 / 5.38

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	90kg/m²	16.32m²	Sawn	+/- 2mm	+/- 2mm
400x400x30mm	P5	90kg/m²	10.88m²	Sawn	+/- 2mm	+/- 2mm
600x400x12mm	P5	36kg/m²	28.80m²	Sawn	+/- 2mm	+/- 2mm
400x400x12mm	P5	36kg/m²	19.20m²	Sawn	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	22kg each	68Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 610x406x30/80mm	P5	25kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
Cobblestones						
Uniform Mesh Straightbond 90x90x20	P5	52kg/m²	24.70 m²	Split	+/- 2mm	+/- 2mm
Uniform Mesh Brickbond 90x90x20	P5	52kg/m²	24.70 m²	Split	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Circular - Medium Ø 600x30mm	P5	25kg each	40Pcs	Sawn	+/- 2mm	+/- 2mm
Circular - Large Ø 800x30mm	P5	44kg each	25Pcs	Sawn	+/- 2mm	+/- 2mm
Rectangular 800x400x30mm	P5	28kg each	34Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

RAVEN - Flamed Finish (Continued)							
Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance		
					Dimension	Thickness	
Stepping Stones & Treads (Continued)							
Step Tread 1210x400x30mm	P5	42kg each	25Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm	

SABLE - Flamed Finish							
Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
141	24		47.08	0.14	0.41		

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
Uniform Mesh Brickbond 90x90x20	P5	52kg/m²	24.7m²	Split	+/- 2mm	+/- 2mm

Bluestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

BLUESTONE - Sawn & Honed Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
132.6	21.2		51.7	10.7	0.6		

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Crazy Paving 20mm	P5	60kg/m²	20m²	Sawn	n/a	+/- 2mm
Stepping Stones & Treads						
Organic - Medium ~600mmx600mmx30mm	P5	~32.4kg each	25Pcs	Raw + Split	+/- 100mm	+/- 2mm
Organic - Large ~900mmx500mmx30mm	P5	~40.5kg each	25Pcs	Raw + Split	+/- 100mm	+/- 2mm

VIRTAAVA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
132.6	21.2		51.7	10.7	0.6		12.24 / 4.64

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Pavers & Tiles						
600x400x30mm	P5	80kg/m²	16.32m²	Sawn	+/- 2mm	+/- 2mm
600x400x12mm	P5	34kg/m²	28.80m²	Sawn	+/- 2mm	+/- 2mm
Copings						
600x400x30mm	P5	19.2kg each	68Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
800x400x30mm	P5	27kg each	34Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
*Rebated 600x400x30/80mm	P5	24.3kg each	38Pcs	Rebate	+/- 2mm	+/- 2mm
*Rebated 800x400x20/60mm	P5	24.5kg each	52Pcs	Rebate	+/- 2mm	+/- 2mm
Stepping Stones & Treads						
Rectangular 800x400x30mm	P5	27kg each	34Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm
Step Tread 1210x400x30mm	P5	39.4kg each	25Pcs	Sawn (Profiles Available)	+/- 2mm	+/- 2mm

Porphyry Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

PORPHYRY - Split Finish							
Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
178	24		74	0.7			20.76 / 6.94

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Split Crazy Paving 20-40mm	P5	90kg/m²	17.64m²	Split	n/a	n/a
Cobblestones						
Split Loose - Cube 100x100x20-60mm	P5	100kg/m²	14.82m²	Split	n/a	n/a
Split Loose - Filetti Random Dimensions	P5	100kg/m²	12.5m²	Split	n/a	n/a

Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ACERO - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
21.15	11.84		94	0.49	1.26		33.73 / 18.54

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Loose - Cube 100x100x20-40mm	P5	81kg/m²	10.88m²	Split	n/a	n/a

CALOR - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
22	14.26		94	0.3	0.8		42.63 / 21.99

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Split Crazy Paving 20-40mm Standard Format	P5	72kg/m²	11m²	Split	n/a	n/a
Split Crazy Paving 20-40mm Large Format	P5	95kg/m²	11m²	Split	n/a	n/a

HERITAGE - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
72	18.9		14.15	0.18	0.64	50 / 43.88	34.4 / 19.45

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Brickbond 90x90x20mm	P5	45kg/m²	18.72m²	Split	+/- 4mm	+/- 4mm

KALDUR - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
							20.13 / 7.23

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Split Crazy Paving 20-40mm	P5	65kg/m²	23m²	Split	n/a	n/a

Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

KURO - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
							22.08 / 9.15

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Split Crazy Paving 20-40mm	P5	52kg/m²	25m²	Split	n/a	n/a

MONTREUX - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
141	24		19.44	0.14	0.41	44 / 40.59	31.91 / 12.32

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Straightbond 90x90x20mm	P5	43kg/m²	19.2m²	Antique	+/- 4mm	+/- 4mm

PILVI - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
124	12.1		80.51	0.51	0.84	40 / 36.89	25.9 / 10.29

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Straightbond 90x90x20mm	P5	45kg/m²	19.2m²	Split	+/- 4mm	+/- 4mm

PLUME - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
101.6	17.2		25.53	0.06	0.26	29 / 27.42	23.91 / 12.3

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Straightbond 90x90x20mm	P5	45kg/m²	19.2m²	Split	+/- 4mm	+/- 4mm

Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

VARI - Antique Finish							
Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
131	19.4		10.91	0.1	0	39 / 36.15	35.65 / 25.06

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Straightbond 90x90x20mm	P5	45kg/m²	19.2m²	Split	+/- 4mm	+/- 4mm

Slate Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

ARKKIA - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
			73				29.05 / 12.41

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Modular & Irregular						
Split Crazy Paving 20-40mm	P5	60kg/m²	20m²	Split	n/a	n/a
Cobblestones						
Split Loose - Cube 100x100x20-40mm	P5	90kg/m²	10m²	Split	n/a	n/a
Split Loose - Filetti Random Dimensions	P5	90kg/m²	18m²	Split	n/a	n/a

ASKA - Split Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
			68.33				

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Split Mesh - Brickbond 90x90x20mm	P5	52kg/m²	24.7m²	Split	+/- 2mm	+/- 4mm

Terracotta Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

KOTTA - Antique Finish

Compressive Strength (MPa)	Flexural Strength (MPa)	Salt Resistance (%)	Crystalline Silica (%)	Water Absorption (%)	Open Porosity (%)	Solar Index/ Reflectence (SI) / (%)	LRV Mean Dry/ Mean Wet (Yd) / (Yw)
							31.46 / 23.83

Size mm	Slip Resistence	Weight UOM	Pack Volumes per crate	Edge Finish	Size Tolerance	
					Dimension	Thickness
Cobblestones						
Uniform Loose 305x47x25mm	P5	52kg/m²	15m²	Antique	+/- 5mm	+/- 5mm

1300 301 898
artisanexterior.com.au